


S-11-16-23-30




pure feelings. innovative solutions.

DRYER TROMMELTROCKNER ESSICCATORI

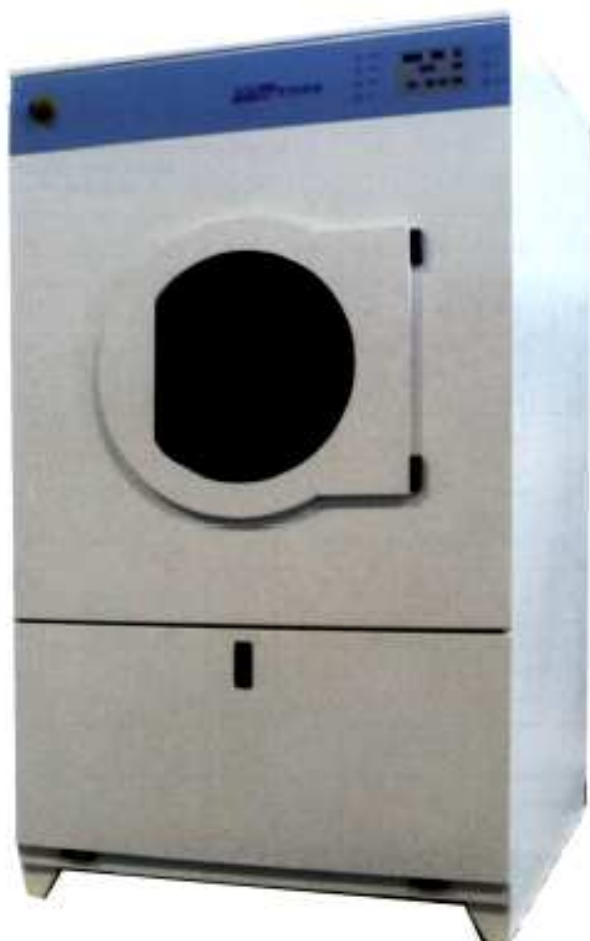

Krebe - Tippo d.o.o., Maribor :: Špelina ulica 19 :: 2000 Maribor :: Slovenia
tel. +386 (0) 2 450 30 50 :: fax: +386 (0) 2 461 20 10 :: krebe.tippo@siol.net :: www.krebe-tippo.si



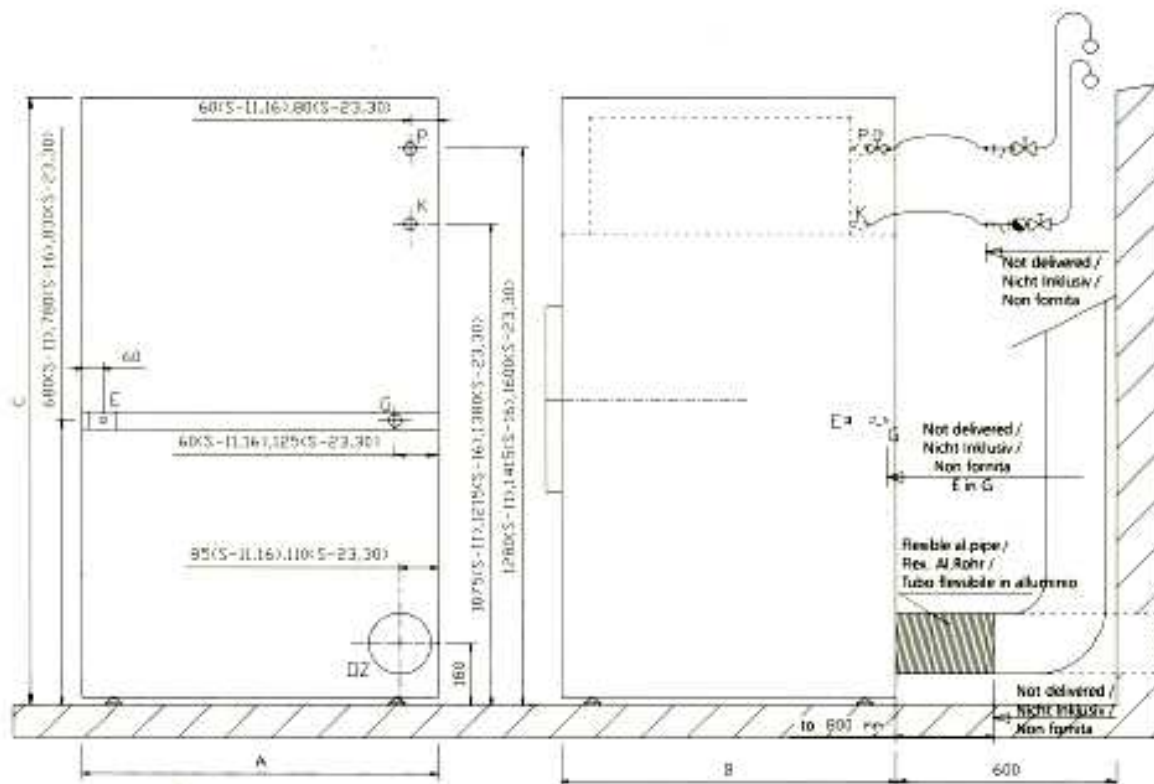

El connection must be done using variable main switch board
 Die El-Verbindung müssen mit geeigneten Schalter gemacht werden
 Le macchine devono essere collegate alla tensione elettrica di rete tramite adeguato interruttore magnetotermico da noi non fornito.

In steam models closed steam inlet valve should be included complete of filter
 to avoid dirtiness
 Dampfleitungen durch Absperrventile und Schmutzfänger durchführen
 nei modelli a vapore prevedere una valvola chiusa ingresso vapore

Recommended distance between machines: 50 - 100mm
 Empfehlungswerte Distanz zwischen Maschinen: 50 - 100 mm
 Prevedere lo spazio di mm 50 - 100 tra una macchina e l'altra

All rights for any modifications without prior notice are reserved.
 Alle Rechte für Veränderungen sind vorbehalten
 Tecnici soggetti a modifica senza preavviso

technical dates / Technische Daten / caratteristiche tecniche	unit / Einheit / unità	11-E	11-P	11-G	16-E	16-P	16-G	23-E	23-P	23-G	30-E	30-P	30-G
load capacity 1:20 / Füllungskapazität 1:20 / capacità di carico 1:20	kg/h	10	10	10	16	16	16	23	23	23	30	30	30
width A / breite A / larghezza A	mm	835	835	835	835	835	835	1030	1030	1030	1030	1030	1030
depth B / tiefe B / profondità B		710	710	710	960	960	960	1020	1020	1020	1250	1250	1250
height C / höhe C / altezza C		1430	1430	1570	1570	1570	1570	1770	1770	1770	1800	1800	1800
motor power / Motorstärke / potenza motori trasmissione	kW	0,37*						0,37					
ventilator power / Ventilatorstärke / potenza motori aspirazione		0,37*						0,55					
total power (motor&ventilator) / Gesamtstärke / potenza motori trasmissione & aspirazione		0,37						0,55					
type of heating / Heizungsart / riscaldamento:	steam / Dampf / vapore		15,3			21,5			26,8			36,8	
	electric / Elektrik / elettrico	14			21			24			28,8		
	Gas			15,7			24			28			33
fuse / Sicherung / totale assorbimento	A	25	10	10	35	10	10	50	10	10	50	10	10
connection el.cable / Verbindung el.Kabel / collegamento elettrico cablaggi	mm ² Cu	5 x 4	5 x 1,5		5 x 6	5 x 1,5		5 x 10	5 x 1,5		5 x 10	5 x 1,5	
electric supply / El.Lieferung / aliment.elettrica		400V, 3N AC, 50Hz											
steam pressure / Dampfdruck / pressione riscaldamento vapore	bar	6 - 8			6 - 8			6 - 8			6 - 8		
connections / Verbindung / funzionamento:	steam / Dampf / vapore	20			20			20			20		
	condens / Niederschlag / condensa	15			15			15			15		
	Gas	15			15			15			15		
exhaust air / Ausgangsluft / scarico aria	DN	150						200					
ventilator capacity / Ventilatorkapazität / volume aria	m ³ /h	1000			1200			1600			2000		
gross weight / Bruttogewicht / peso lordo della macchina	kg	230			280			350			390		

* for models with reversing drum
 * Für Modelle mit Reversierstrommel
 * modelli con inversione

KREBE TIPPO

Agent:
 Agente:

RAKIC WORKS
26 THOMAS STREET
CAVAN SA 5094
TEL: 08 8359 4766