






TR.888



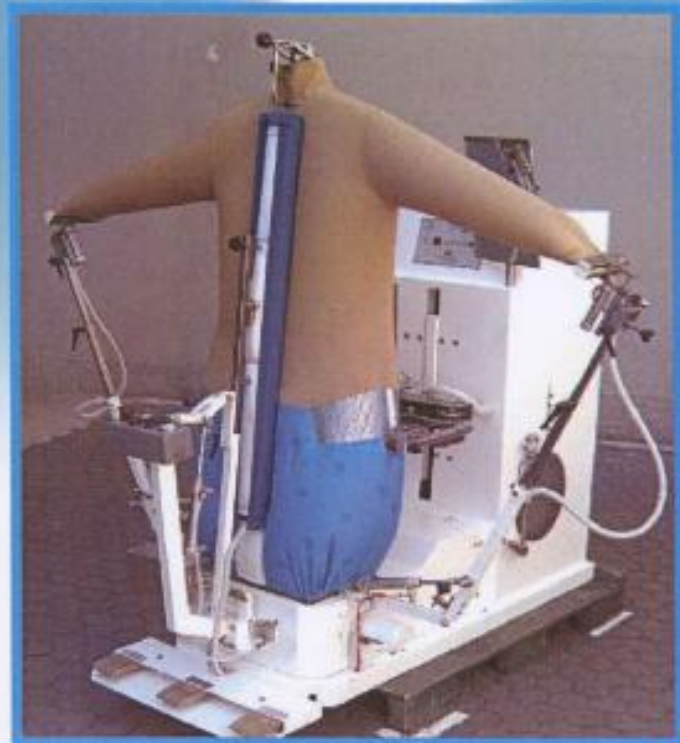


TR.888

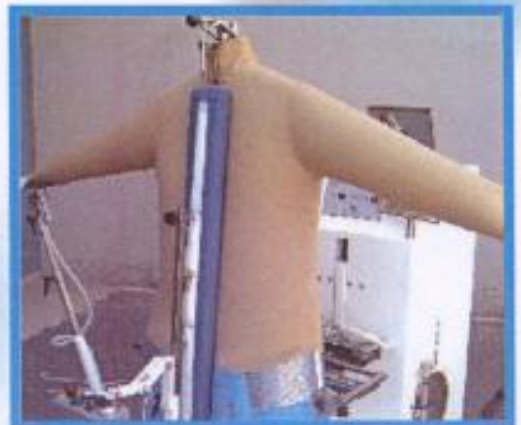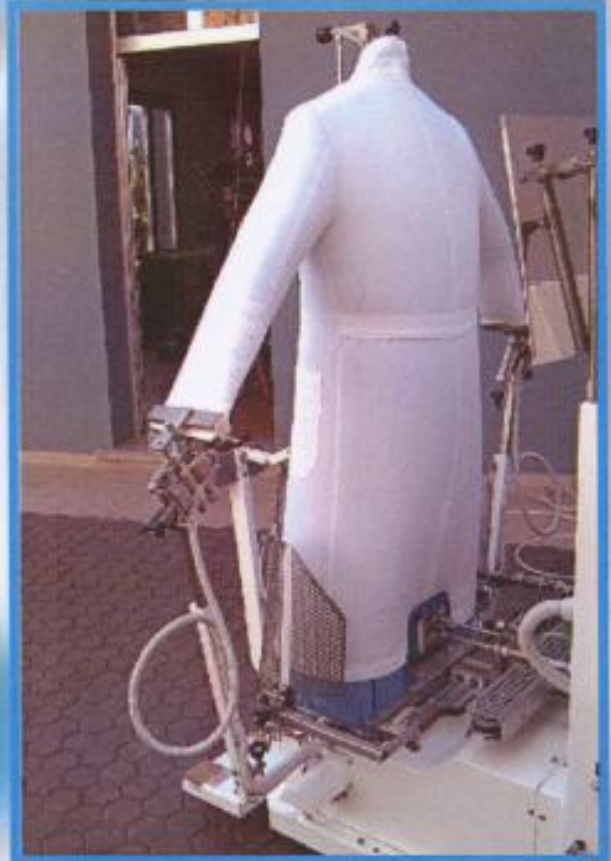



TR.888 + BPF/AS + NEB

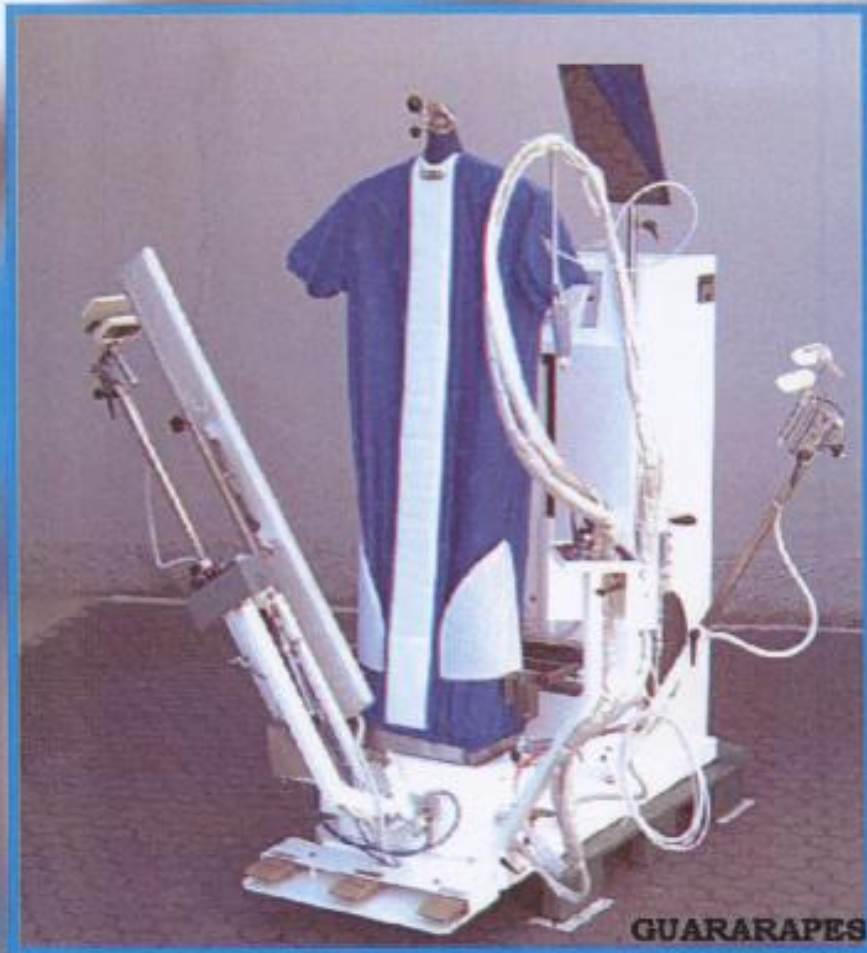


GUARARAPES





TR.888

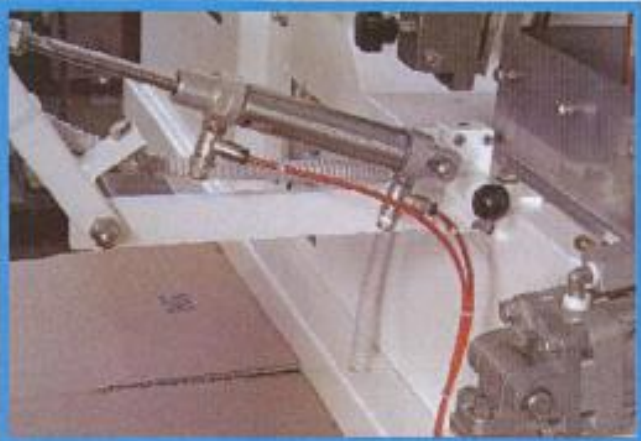



MALAVASI s.r.l. C.so Genova, 53 27029 VIGEVANO (PV) ITALY Tel. + 39 0381 82640 r.a. Fax + 39 0381 82654

*** TR.888 ***

* DIMENSIONI - DIMENSIONS	: CM. 145/200 x CM. 180 P x CM. 170 H.
* PESO NETTO - NET WEIGHT	: KG. 310=
* VENTILATORE - FAN MOTOR	: HP. 3=
* ASPIRATORE - SUCTIONING FAN	: HP. 0,40=
* RESISTENZE CANDELA - HEATING ELEMENTS	: 2 x 450 WATT.
* ASSORBIMENTO - MAX ELECTRIC CONSUMPTION	: 3,5 KW per HOUR.
* CONSUMO VAPORE - STEAM CONSUMPTION (6 BAR)	: KG. 15/20 per HOUR ABOUT !!!
* CONSUMO ARIA - AIR CONSUMPTION (6 BAR)	: NORMAL LITRES 15/20 per MINUTE.
* ENTRATA & USCITA VAPORE - STEAM INLET & OUTLET	: 1/2" GAS.
* ARIA COMPRESSA - AIR COMPRESSED (5/6 BAR)	: 1/4" GAS.
* VOLTAGGIO - VOLTAGE	: 230 - 400 - 440 V / 50 - 60 Hz / 3 Ph.

* MANICHINO AUTOMATICO PER STIRO CAMICI, CAMICIE e CAPI SIMILARI.
* AUTOMATIC FORM-FINISHER FOR SHIRTS, WHITE OVERALLS AND SIMILAR GARMENTS PRESSING.

* PINZETTE TENDIMANICHE a TRAZIONE REGOLABILE by MICRO-SWITCH !!!
* SLEEVES CLAMPS a ADJUSTABLE TRACTION by MICRO-SWITCH !!!

* PALA FRONTALE RISCALDATA (500 WATT) INCLINABILE CON COMANDO INDIPENDENTE.
* HEATED (500 WATT) AND MOVABLE FRONT PADDLE CLAMP WITH INDIPENDENT CONTROL.

* GRUPPO "TENSIONAMENTO FIANCHI e PARTE POSTERIORE" AUTOMATICO !!!
* AUTOMATIC "SIDES SEAMS & REAR PART TENSIONING" GROUP by SENSORS & PHOTOCCELL !!!

* STOP SALITA CARRO con RICERCA AUTOMATICA !!!
* CLIMB OF CARRIAGE with AUTOMATIC "STOP" RESEARCH !!!

* FUSTO "ASPIRANTE" ZONA BOTTONI by APPOSITO ASPIRATORE con AUTORESET.
* "SUCTIONING" FRONT SHAPE (BUTTONS AREA) by DEDICATED SMALL FAN with AUTORESET.

* CICLO LAVORO by SCHEDA "TR" ELETTRONICA con 10 PRG STIRO !!!
* WORKING CYCLE by "TR" ELECTRONIC CARD with 10 STORED FINISHING PRG !!!

* INR - INVERTER - DEVICE :
* REGOLAZIONE ARIA SOFFIATA by INR con VELOCITÀ MOTORE REGOLABILE da 0 a 3200 RPM !!!
* ADJUSTABLE AIR-BLOWING VOLUME by INR with REGULATION SPEED MOTOR fm 0 to 3200 RPM !!!

* BPF/F16 or AS - DEVICE :
* BRACCIO PORTA FERRO CON FERRO "F 16 o AS" SOLO VAPORE.
* MOVABLE ARM WITH "F 16 or AS" ALL STEAM IRON (ONLY STEAM HEATED).

* NEBULIZZATORE - WATER SPARY GUN : **DEVICE !!!**

* VAPORE SURRISCALDATO da 0 a 350° C - ADJUSTABLE SUPERHEATED STEAM from 0 to 350° C.

* **CONFORME A TUTTE le NORMATIVE CE !!! - CONFORMITY WITH any EC RULES !!!**